



**NOTES:**

1. **CABLE SIZE:** 1.50mm squared PVC max. (Max. cable diameter of 10mm). Cable of sizes 0.75mm squared PVC and rubber, or 1.00mm squared PVC and rubber are acceptable for use. Max. cable O.D. is 10mm. Use only 3 wire cable with this product.
2. Prepare wires per the "Wire Preparation" drawing below.
3. Insert wires into the appropriate terminal locations as demonstrated in the "Wiring Diagram" below.
4. Place cable in the cable channel and install cable clamp over the cable. Tighten until the jacket is compressed slightly. When installing clamp, ensure that the cables outer jacket extends beyond the clamp in order to prevent damage to conductors.
5. Replace cover and secure.
6. Do not over tighten screws, which could cause stripping of the threads.
7. **TORQUE RECOMMENDATIONS:** Terminals = 0.9Nm (8inlb) ; Cable clamp = Finger tighten until jacket is slightly compressed; cover screws = finger tight.

WIRE PREPARATION

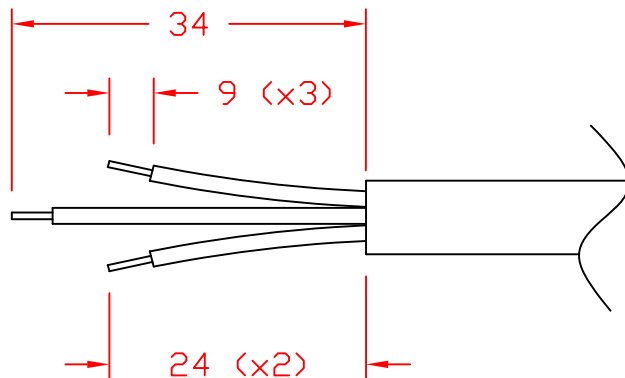

WIRING DIAGRAM

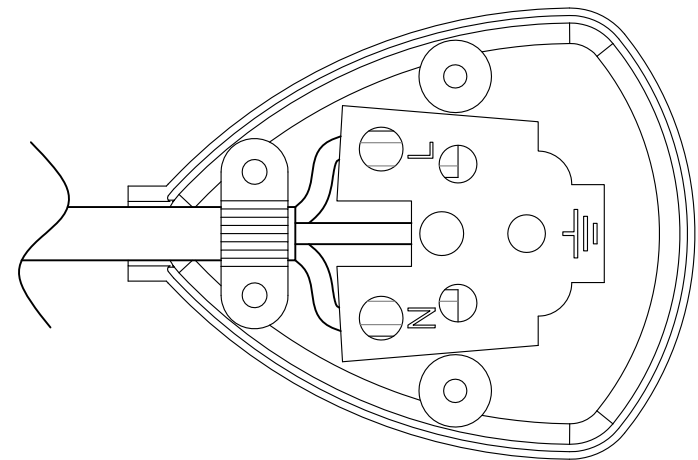

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPRIETARY CONFIDENTIAL PROPERTY OF INTERPOWER CORPORATION. NO USE OR COPIES MAY BE MADE WITHOUT WRITTEN PERMISSION FROM INTERPOWER CORPORATION.

DIMENSIONS IN MILLIMETERS

TITLE: 88040240 Wiring Instructions

DRAFT BY: ATS/JM DATE: 03/05/13

PART NUMBER: W188040240

DRAFTING APPROVAL: DDF DATE: 3/22/13

A	INITIAL RELEASE	03/05/13	ATS/JM
---	-----------------	----------	--------

MATERIAL:

SCALE: FULL SCALE

INTERPOWER CORPORATION

REV	CHANGE DESCRIPTION	DATE	INITIALS
-----	--------------------	------	----------

SHEET 1 OF 1