


**WIRE DETAIL**  
NOT TO SCALE

- \* Use only cable with cross section 1.00 to 2.50mm<sup>2</sup> (Max. diameter 11mm) type H05VV-F.
- \* Prepare wires according to the 'Wire Detail' view at the left. Cable entry hole may also need preparation to accept the larger diameter cables, by trimming and enlarging the hole.

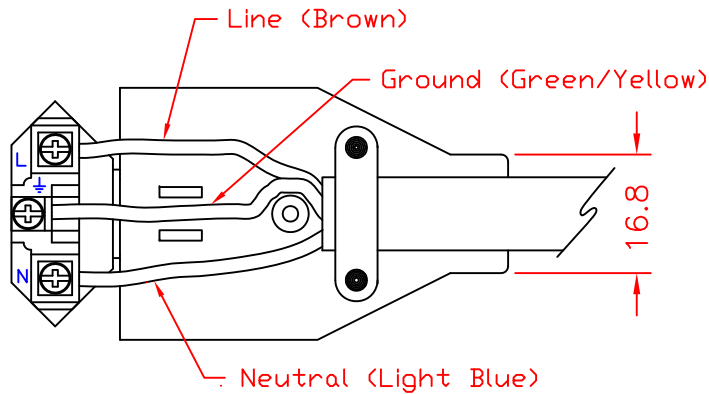

**WIRING VIEW**

- \* Insert wires into appropriate terminal locations as demonstrated in the "Wiring View" drawing in the lower left corner. Then, remove strain relief and place cable in cradle. Replace strain relief and alternately tighten screws until adequately secure.

- \* Replace cover and secure.

- \* Plug features additional locking feature that will only function with specially designed mating connector (88040310). Plug can be used in conjunction with other connectors, but locking feature will be non-functional.

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPRIETARY CONFIDENTIAL PROPERTY OF INTERPOWER CORPORATION. NO USE OR COPIES MAY BE MADE WITHOUT WRITTEN PERMISSION FROM INTERPOWER CORPORATION.

**DIMENSIONS IN MILLIMETERS**

**TITLE** 20A Brazillian Plug  
Wiring Instruction

**DRAFT BY:** DDF **DATE:** 2/8/11

**PART NUMBER:** WI88040300

**DRAFTING APPROVAL:** **DATE:**

**MATERIAL:**

**DD NOT SCALE**

**INTERPOWER CORPORATION**

**SHEET 1 OF 1**

REV	CHANGE DESCRIPTION	DATE	INITIALS
A	Creation of wiring instruction.	2/8/11	DDF