


WIRE DETAIL
NOT TO SCALE

- * Use only cable with cross section 0.75 to 1.50mm² (Max. diameter 9.8mm) type H05VV-F.
- * Prepare wires according to the 'Wire Detail' view at the left. Cable entry hole may also need preparation to accept the larger diameter cables, by trimming and enlarging the hole.
- * Insert wires into appropriate terminal locations as demonstrated in the "Wiring View" drawing in the lower left corner. Then, remove strain relief and place cable in cradle. Replace strain relief and alternately tighten screws until adequately secure.
- * Replace cover and secure.
- * Connector features additional locking feature that will only function with specially designed mating plug (88040200). Connector can be used in conjunction with other plugs, but locking feature will be non-functional.

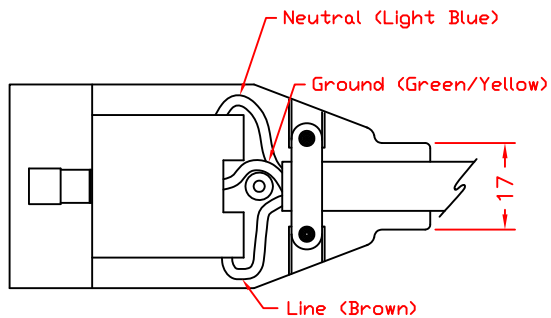

WIRING VIEW

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPRIETARY CONFIDENTIAL PROPERTY OF INTERPOWER CORPORATION. NO USE OR COPIES MAY BE MADE WITHOUT WRITTEN PERMISSION FROM INTERPOWER CORPORATION.				DIMENSIONS IN MILLIMETERS		TITLE 10A Brazilian Cable Connector Wiring Instructions	
				DRAFT BY: DDF		DATE: 2/8/11	
A Wiring Instruction Creation				2/8/11		INTERPOWER CORPORATION	
REV CHANGE DESCRIPTION				DATE INITIALS		SHEET 1 OF 1	