

13 amp Trailing Socket

Instructions for use


MAXIMUM RATING 13 AMPS/3120 WATTS

FC.133

88010422

88010980

- 1 Total maximum load **must not exceed 13 amps.**
 - 2 The socket must not be wired directly into the mains, but must be connected **by means of a flexible cord minimum size 1.25mm², and a fused 3 pin plug.**
 - 3 It is important to wire the socket correctly; this means connecting the right colour wire to the applicable terminal in the socket.
 - 4 Remove 50mm of outer sheathing from the cable. (See Fig. 1). Carefully strip enough insulation to expose 6mm of wire. Twist the bare strands clockwise.
 - 5 Run the brown wire to the terminal marked L, the blue wire to N and the green and yellow wire to E.
 - 6 Ensure that the bared ends of the cords are inserted into the terminals and firmly clamped.
- (continued overleaf)

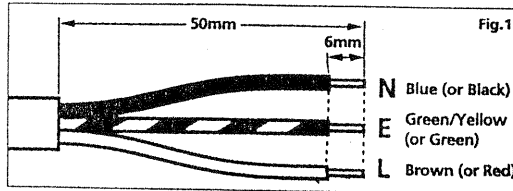

WARNING:
Earth connection must be made for safety reasons.
IF IN DOUBT CONSULT A QUALIFIED ELECTRICIAN

13 amp Trailing Socket


Instructions for use

continued

MAXIMUM RATING 13 AMPS/3120 WATTS

FC.133

- 7 Cord sheath must be securely clamped by means of the cord grip shown in Fig. 2.
- 8 Replace cover and tighten screws.
- 9 Do not use electrical equipment where it may be subjected to excessive moisture or dampness.

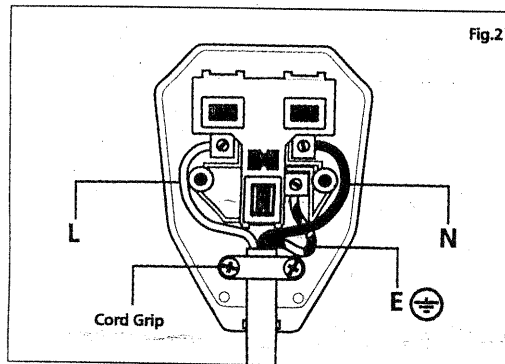

Supplied by
Novar ED&S Limited UK
W8215 06/94 Ed.4

