
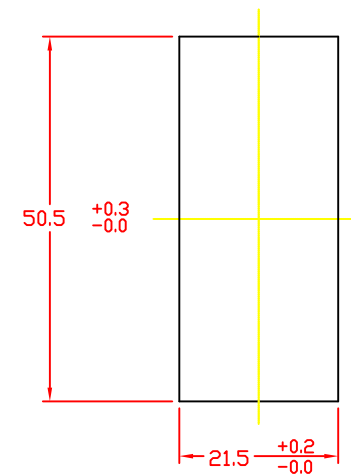
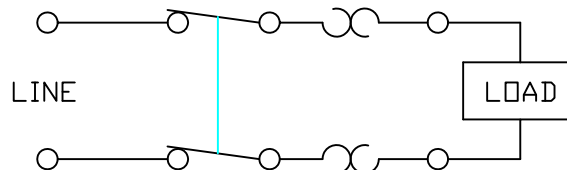


ROCKER MARKING

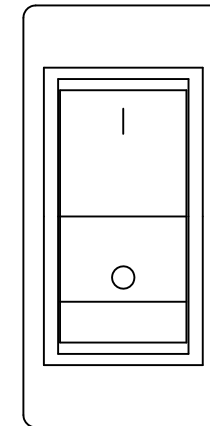

Trip Current is 140% of rated current.
 Tripping time in seconds at 73°F(23°C) at various overload levels:

OVERLOAD LEVEL:	100%	200%	300%	400%	500%	600%	1000%
8A Rating:	No Trip	8-30'	2.5-10'	1.5-4.5'	1-3'	0.7-2'	0.3-0.9'

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPRIETARY CONFIDENTIAL PROPERTY OF INTERPOWER CORPORATION. NO USE OR COPIES MAY BE MADE WITHOUT WRITTEN PERMISSION FROM INTERPOWER CORPORATION.

DIMENSIONS IN MILLIMETERS

TITLE 8A Circuit Breaker

DRAFT BY: DDF DATE: 12-30-02

PART NUMBER: 82910050

DRAFTING APPROVAL: DDF DATE: 12-30-02

MATERIAL:

DO NOT SCALE

INTERPOWER CORPORATION

SHEET 1 OF 1

REV	CHANGE DESCRIPTION	DATE
A	Updated table per manufacturer spec. DDF	11/02/11