
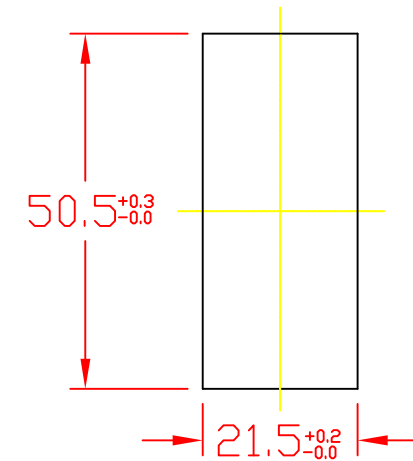
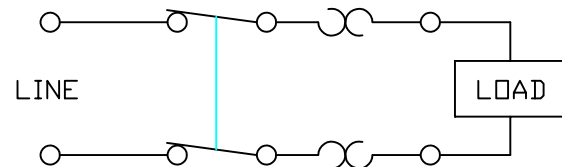


PANEL THICKNESS:
0.99-6.35mm

ROCKER MARKING

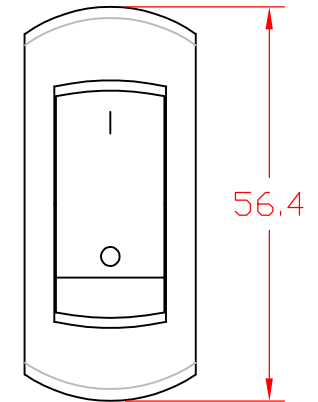

Trip Current is 140% of rated current.
Tripping time in seconds at 73°F(23°C) at various overload levels:

OVERLOAD LEVEL:	100%	200%	300%	400%	500%	600%	1000%
10A Rating:	No Trip	8-30"	2.5-10"	1.5-4.5"	1-3"	0.7-2"	0.3-0.9"

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPRIETARY CONFIDENTIAL
PROPERTY OF INTERPOWER CORPORATION. NO USE OR COPIES
MAY BE MADE WITHOUT WRITTEN PERMISSION FROM INTERPOWER CORPORATION.

DIMENSIONS IN MILLIMETERS

TITLE 10A Circuit Breaker

DRAFT BY: DDF DATE: 12-14-20

DRAFTING APPROVAL: DDF DATE: 12-14-20

PART NUMBER: 82910062

MATERIAL:

DO NOT SCALE

INTERPOWER CORPORATION

DATE

SHEET 1 OF 1

A Introduction of part replacing 82910060. DDF

REV CHANGE DESCRIPTION