
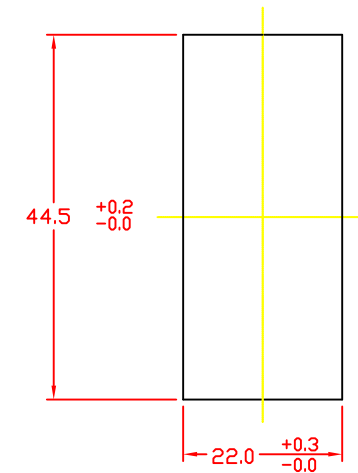
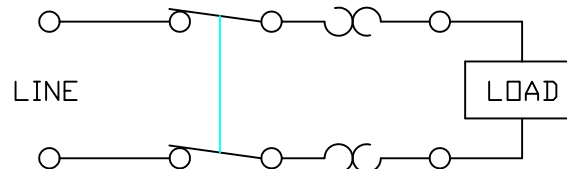


# ROCKER MARKING

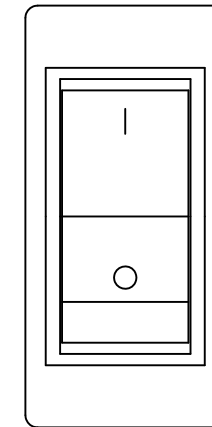

Trip Current is 140% of rated current.  
Tripping time in seconds at 73°F(23°C) at various overload levels:

OVERLOAD LEVEL:	100%	200%	300%	400%	500%	600%	1000%
15A Rating:	No Trip	8-40"	3-9"	1.5-4"	0.9-2.8"	.6-2"	.2-.65"

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPRIETARY CONFIDENTIAL  
PROPERTY OF INTERPOWER CORPORATION. NO USE OR COPIES  
MAY BE MADE WITHOUT WRITTEN PERMISSION FROM INTERPOWER CORPORATION.

## DIMENSIONS IN MILLIMETERS

DRAFT BY: DDF DATE: 08-31-11

DRAFTING APPROVAL: JPC DATE: 08-31-11

MATERIAL:

TITLE 15A Circuit Breaker  
with Integral Switch Guard

PART NUMBER: 82910270

DO NOT SCALE

SHEET 1 OF 1

INTERPOWER  
CORPORATION

A Introduction of part to active product line.

8/31/11

REV CHANGE DESCRIPTION

DATE