


This cutout is good for both front and back mounting applications. However, with back mount applications, the panel thickness is recommended to not exceed 1.5mm.

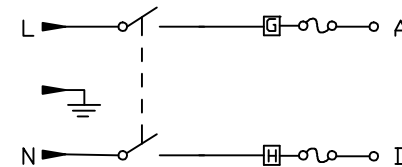

Note 1: Recommended diameter for thru-hole (screw/nut combination) hardware mounting method. Other methods will require holes with different dimensions and parameters.

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPRIETARY CONFIDENTIAL PROPERTY OF INTERPOWER CORPORATION. NO USE OR COPIES MAY BE MADE WITHOUT WRITTEN PERMISSION FROM INTERPOWER CORPORATION.

REV	CHANGE DESCRIPTION	DATE	INITIALS	DIMENSIONS IN MILLIMETERS	TITLE
D	Added dimension information to cutout screw holes and Note 1.	4/10/12	DDF	DRAFT BY: JPC DATE: 5-5-2003 DRAFTING APPROVAL: JPC DATE: 5-5-2003	Module
C	Updated drawing - new boss design/location.	1/27/11	DDF		PART NUMBER: 83543060
B	Added countersink information.	1/11/11	DDF	MATERIAL: DD NOT SCALE SHEET 1 OF 1	INTERPOWER CORPORATION
A	Added back view to drawing.	6/21/07	DDF		