


This cutout is good for both front and back mounting applications. However, with back mount applications, the panel thickness is recommended to not exceed 1.5mm.

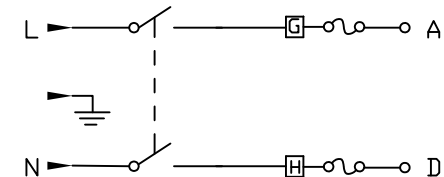

Note 1: Recommended diameter for thru-hole (screw/nut combination) hardware mounting method. Other methods will require holes with different dimensions and parameters.

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPRIETARY CONFIDENTIAL PROPERTY OF INTERPOWVER CORPORATION. NO USE OR COPIES MAY BE MADE WITHOUT WRITTEN PERMISSION FROM INTERPOWVER CORPORATION.				DIMENSIONS IN MILLIMETERS		TITLE Prewired Module	
				DRAFT BY: ATS/KKA		DATE: 7-30-13	
				DRAFTING APPROVAL: DDF		DATE: 8-06-13	
A Initial Release		07/30/13		ATS/KKA		DO NOT SCALE	
REV		CHANGE DESCRIPTION		DATE		INITIALS	
						SHEET 1 OF 1	
						INTERPOWVER CORPORATION	