
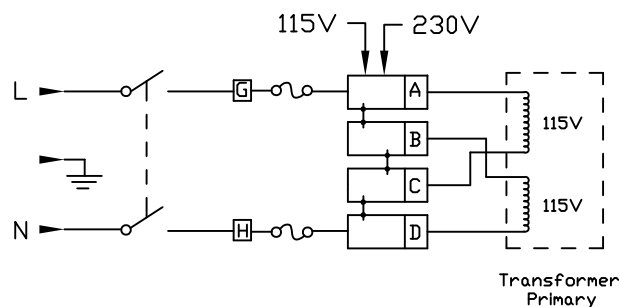


Ø3.2(x2)[See Note 1]

This cutout is good for both front and back mounting applications. However, with back mount applications, the panel thickness is recommended to not exceed 1.5mm.

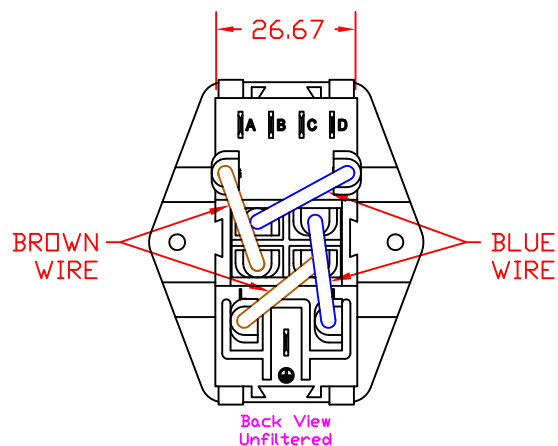

Note 1: Recommended diameter for thru-hole (screw/nut combination) hardware mounting method. Other methods will require holes with different dimensions and parameters.

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPRIETARY CONFIDENTIAL PROPERTY OF INTERPOWER CORPORATION. NO USE OR COPIES MAY BE MADE WITHOUT WRITTEN PERMISSION FROM INTERPOWER CORPORATION.

#### DIMENSIONS IN MILLIMETERS

TITLE Prewired Module

DRAFT BY: ATS/KKA DATE: 7-30-13

DRAFTING APPROVAL: DDF DATE: 8-06-13

PART NUMBER: 83544530

MATERIAL:

DO NOT SCALE

INTERPOWER CORPORATION

A Initial Release

07/30/13 ATS/KKA

REV CHANGE DESCRIPTION

DATE INITIALS

SHEET 1 OF 1