

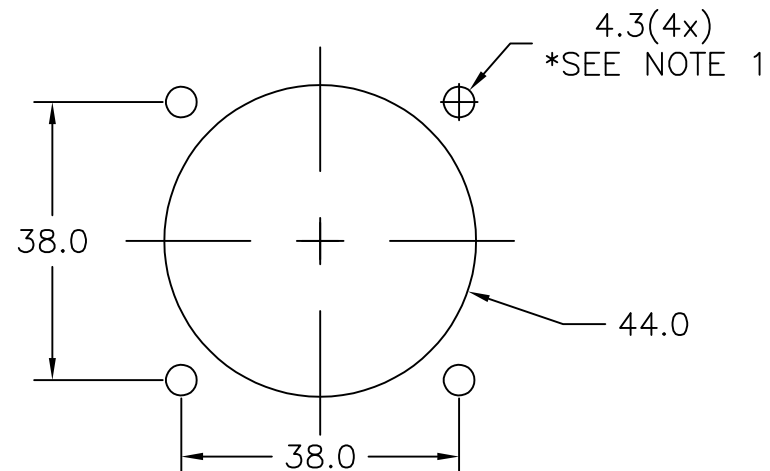



TOP VIEW

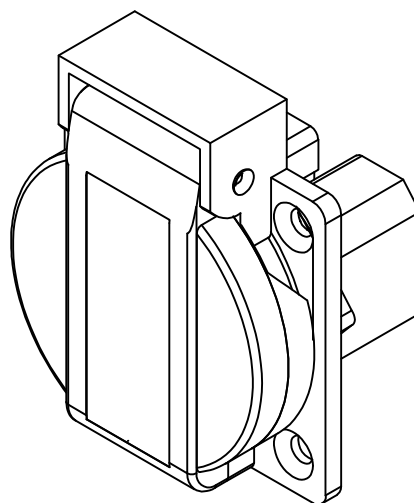


Note 1: Recommended diameter for thru-hole (screw/nut combination) hardware mounting method. Other methods will require holes with different dimensions and parameters.

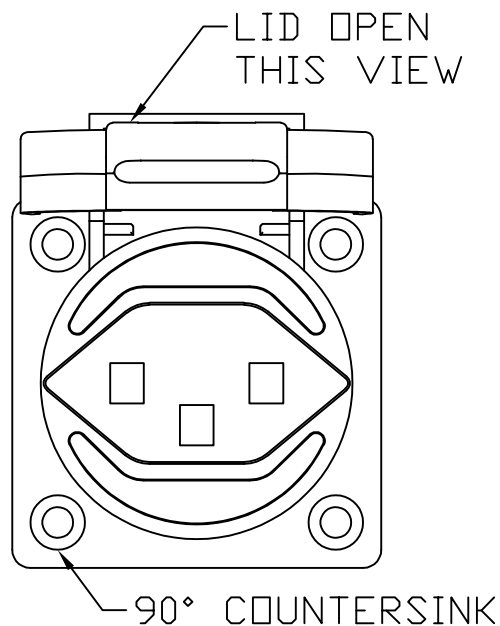

FRONT VIEW

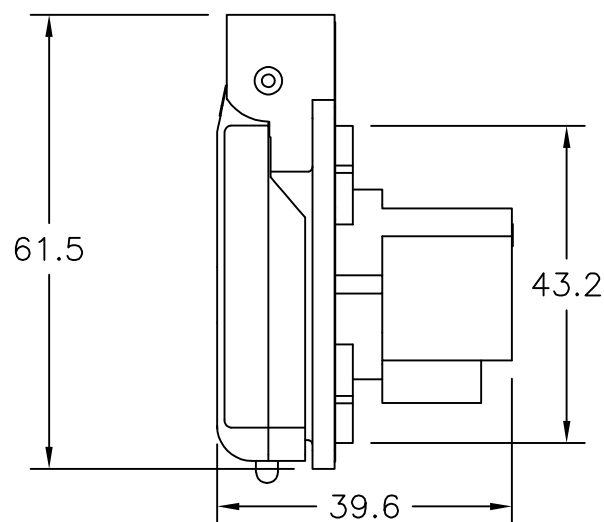

RIGHT SIDE VIEW

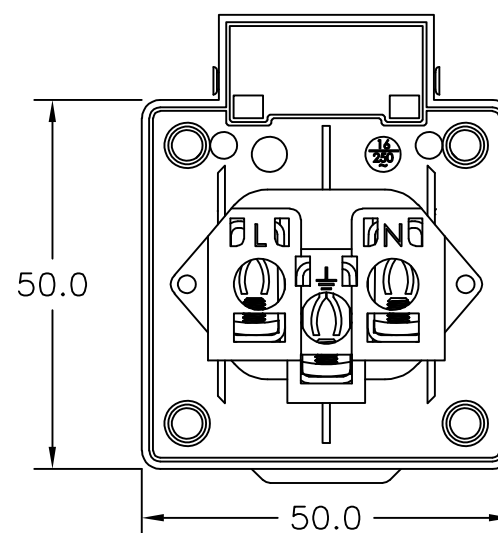

BACK VIEW

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPRIETARY CONFIDENTIAL PROPERTY OF INTERPOWER CORPORATION. NO USE OR COPIES MAY BE MADE WITHOUT WRITTEN PERMISSION FROM INTERPOWER CORPORATION.

DIMENSIONS IN MILLIMETERS

TITLE 16A/250V SWISS SPLASH RESISTANT SOCKET

DRAFT BY: ATS/DEG DATE: 09/03/19

PART NUMBER: 88011030

DRAFTING APPROVAL: DDF DATE: 9/11/19

MATERIAL: POLYAMIDE 6

SCALE: FULL SCALE
SHEET 1 OF 1

INTERPOWER CORPORATION

REV	CHANGE DESCRIPTION	DATE	INITIALS
B	Updated drawings: Lid design and terminal area design change.	9/11/19	DDF
A	Added dimension information to cutout screw holes and Note 1.	3/23/12	DDF