



88010450



Cat No: 90/15
QUICK-CONNECT 3 PIN PLUG

WIRING INSTRUCTIONS

1. Strip insulation as illustrated.
2. Connect the EARTH wire (green/yellow stripe or green) to the terminal marked 'GREEN'; the ACTIVE wire (brown or red) to the 'A' terminal; and the NEUTRAL wire (light blue or black) to the 'N' terminal.
3. Place cord under cord grip and tighten. The cord grip is reversible to accommodate all cord sizes.
4. Fold unit together and secure with screw.

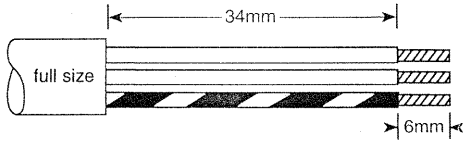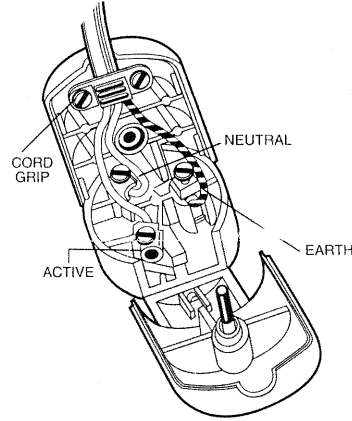

NOTE: This plug is intended for use with 7.5 amp and 10 amp ordinary duty and heavy duty 3 core flexible cable. Also 7.5 amp and 10 amp ordinary duty and heavy duty 2 core flexible cable can be accommodated.

WARNING: Connect only to the A (ACTIVE) and N (NEUTRAL) terminals when using 2 core cable.