




# Quick-Connect 3 Pin Plug

Cat. 90  
Instruction Leaflet


## Wiring Instructions

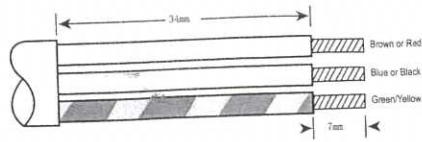

- 1) Strip insulation as illustrated & twist strands
- 2) Insert strands into clamp terminals. Secure tightly
- 3) Place cord under loosened cord grip
- 4) Tighten cord grip. (The cord grip is reversible to accommodate all cord sizes).
- 5) Fold until together and secure with screw.

**Suitable for 10A ordinary and heavy duty.  
\*2 core and 3 core flexible cable.**

**\*WARNING:** Connect only to the (A) ACTIVE and (N) NEUTRAL terminals when using 2 core cable.

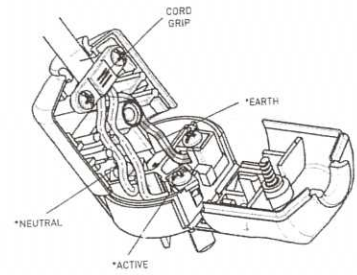

- \* EARTH (E) - Green/yellow (or Green)
- \* ACTIVE (A) - Brown (or Red)
- \* NEUTRAL (N) - Blue (or Black)

## Warning: Wire Correctly



LE04290AA