

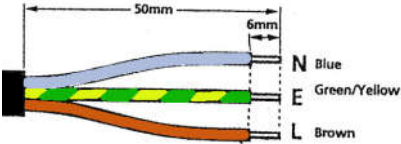




Wiring Instruction
13A/250V UK/Ireland In line Socket
88010981

<ol style="list-style-type: none">1. Total maximum load must not exceed 13 amps.2. The socket must not be wired directly into the power mains.3. Minimum wire size is 1.25mm².4. It is important to wire the socket correctly; this means connecting the right colour wire to the applicable terminal in the socket.	
<ol style="list-style-type: none">1. With the use of the proper tool remove the two screws from the back shell.	
<ol style="list-style-type: none">2. Remove 50mm of the outer cable jacket.3. Strip the insulation to 6mm. 	
<ol style="list-style-type: none">4. Loosen terminal screws.5. Run the brown wire to the terminal marked L, the blue wire to N and the green/yellow to E.6. Torque for terminal screws recommended at 4.5inlb (0.5Nm) maximum.7. Secure the cable by the use of the cord grip as shown. Do not over tighten the screws.	
<ol style="list-style-type: none">8. Refit back-shell and tighten screw using recommended torque of 4.5inlb (0.50Nm) maximum.	