


Note 1: Recommended diameter for thru-hole (screw/nut combination) hardware mounting method. Other methods will require holes with different dimensions and parameters.

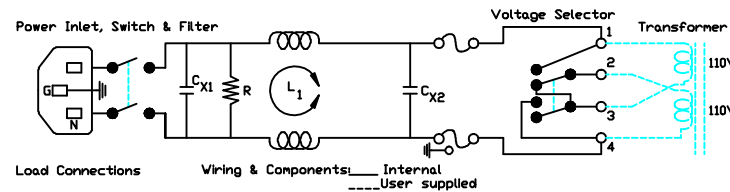

Maximum Leakage Current (L-G) @115VAC/60Hz	Maximum Leakage Current (L-G) @250VAC/50Hz	C1 Capacitor	C2 Capacitors	Inductor	Min. common mode insertion loss (L-G) (dB in 50 ohm sys.) Freq. - MHz								Min. differential mode insertion loss (L-L) (dB in 50 ohm sys.) Freq. - MHz							
					.05	.10	.15	.50	1.0	5.0	10	30	.05	.10	.15	.50	1.0	5.0	10	30
2µA	5µA	.220µF	.1µF	2x2.5mH	10	15	20	30	35	25	20	10	2	5	3	40	50	40	40	35

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPRIETARY CONFIDENTIAL PROPERTY OF INTERPOWER CORPORATION. NO USE OR COPIES MAY BE MADE WITHOUT WRITTEN PERMISSION FROM INTERPOWER CORPORATION.

DIMENSIONS IN MILLIMETERS

TITLE: Five Function Dbl.Fuse Hospital Grade Module

PART NUMBER: 83511430

INTERPOWER CORPORATION

REV	CHANGE DESCRIPTION	DATE	INITIALS
B	Added dimension information to cutout screw holes and Note 1.	4/09/12	DDF
A	Updated description in title block to say 'Hospital Grade'	2/22/12	RLT

DRAFT BY: JPC DATE: 5-5-2003

DRAFTING APPROVAL: JPC DATE: 5-5-2003

MATERIAL:

DO NOT SCALE

SHEET 1 OF 1