


∅3.2(x2)[See Note 1]

This cutout is good for both front and back mounting applications. However, with back mount applications, the panel thickness is recommended to not exceed 1.5mm.

Filter Specifications			
Max. Leakage Current (L-G) @ 120VAC/60Hz	Max. Leakage Current (L-G) @ 250VAC/50Hz	Min. common mode insertion loss (L-G) (dB in 50 ohm system) Freq. - MHz	Min. differential mode insertion loss (L-L) (dB in 50 ohm system) Freq. - MHz
Hospital Grade		Hospital Grade Models	
2.0 micro-amps	5.0 micro-amps	10 A	3 5 8 10 12 11 11 10 2 4 12 16 26 33 40 32
Standard		Standard Models	
0.25 mA	0.50 mA	10 A	3 5 10 13 23 27 35 27 2 4 12 15 22 42 55 45

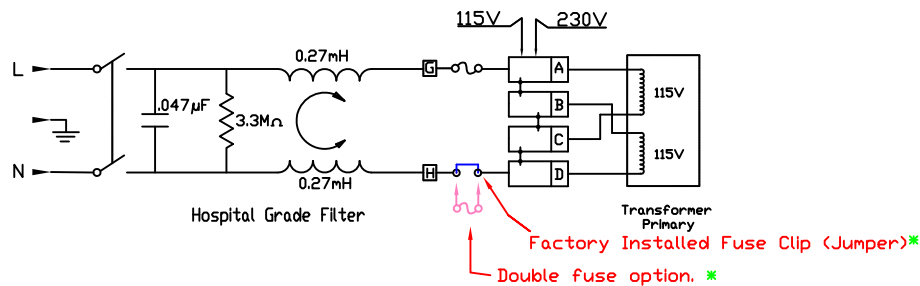

\* Note: Removal of the fuse clip allows the user the option of installing a second fuse for use in applications requiring double fusing.

Note 1: Recommended diameter for thru-hole (screw/nut combination) hardware mounting. Other methods will require holes with different dimensions and parameters.

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPRIETARY CONFIDENTIAL PROPERTY OF INTERPOWER CORPORATION. NO USE OR COPIES MAY BE MADE WITHOUT WRITTEN PERMISSION FROM INTERPOWER CORPORATION.

DIMENSIONS IN MILLIMETERS				TITLE	
DRAFT BY: DDF				DATE: 7/27/17	
DRAFTING APPROVAL: DDF				DATE: 7/27/17	
MATERIAL:				DD NOT SCALE	
SHEET 1 OF 1				SHEET 1 OF 1	
5 Funct. Single Fuse Filter Hospital Grade Module				PART NUMBER: 83545031	
INTERPOWER CORPORATION				INTERPOWER CORPORATION	

A	Introduction of part replacing 83545030.	7/27/17	DDF
REV	CHANGE DESCRIPTION	DATE	INITIALS